




Leading the Industry in  
**Solar Microinverter Technology**

# YC600

## Microinverter

- Dual-module microinverter with independent MPPT
- Utility-interactive with Reactive Power Control (RPC)
- CA Rule 21 compliant
- Continuous power of 274VA per channel, 300VA peak
- Accommodates modules from 250-365W+
- Wide MPPT voltage range (22V-48V)
- Meets NEC 2014/2017 690.12 Rapid Shutdown requirements
- ZigBee communication & free monitoring


### DIMENSIONS

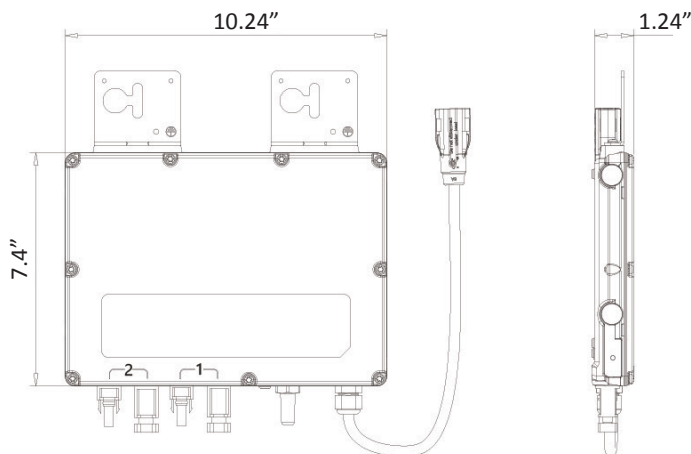

With its groundbreaking design and features, the YC600 is the pinnacle of microinverter technology. A single-phase, smart grid-compliant microinverter, the YC600 serves two modules with dual, independent MPPT. Zigbee wireless communication over a mesh network offers faster data speeds than PLC and a wider MPPT voltage range results in a greater energy harvest for homeowners.

A true utility-interactive microinverter with Reactive Power Control (RPC) technology, the YC600 meets CA Rule 21 requirements and is inherently NEC 2014/2017 Rapid Shutdown compliant. The unit also builds on the successful APsystems line of multi-module microinverters, simplifying installation and reducing logistics costs.

### WIRING SCHEMATIC

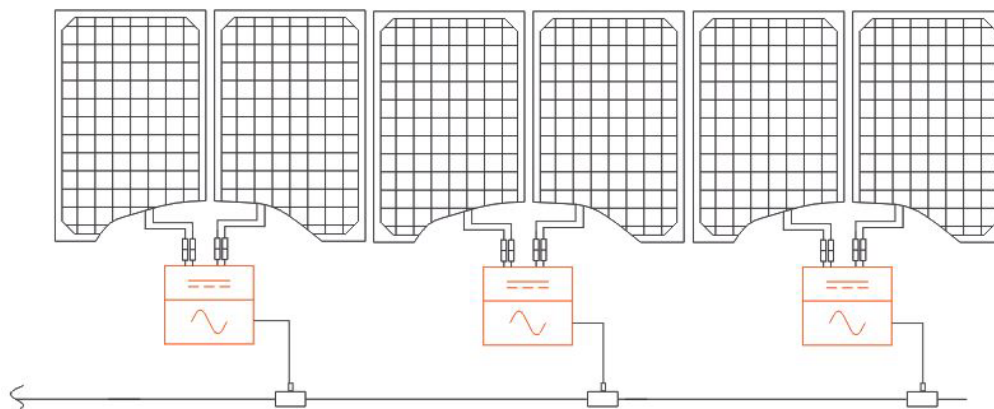

# APsystems YC600 Microinverter Datasheet

## INPUT DATA (DC)

Module Compatibility	60 & 72 Cell PV Modules
MPPT Voltage Range	22V-48V
Operation Voltage Range	16V-55V
Maximum Input Voltage	55V
Maximum Input Current	12A x 2
Maximum Total PV Array Short Circuit Current	15A

## OUTPUT DATA (AC)

	240V	208V
Maximum Continuous Output Power	548VA	548VA
Peak Output Power	600VA	600VA
Nominal Output Voltage	240V	208V
Nominal Output Current	2.28A	2.63A
Nominal Output Frequency	60Hz	60Hz
Adjustable Output Voltage Range	211-264V	183-229V
Adjustable Output Frequency Range	59.3 - 60.5Hz	59.3 - 60.5Hz
Power Factor (Adjustable)	0.8 leading...0.8 lagging	0.8 leading...0.8 lagging
Total Harmonic Distortion	<3%	<3%
Maximum Units per Branch	7 (14 PV modules)	6 (12 PV modules)

## EFFICIENCY

Peak Efficiency	96.7%
CEC Weighted Efficiency	96.5%
Nominal MPPT Efficiency	99.5%
Night Power Consumption	60mW

## MECHANICAL DATA

Operating Ambient Temperature Range	-40°F to +149°F (-40°C to +65°C)
Storage Temperature Range	-40°F to +185°F (-40°C to +85°C)
Dimensions (WxHxD) inches	10.24" x 7.4" x 1.24"
Dimensions (WxHxD) mm	260mm x 188mm x 31.5mm
Weight	5.7 lbs (2.6kg)
AC BUS Maximum Current	20A
Connector Type	MC4 Type
Enclosure Rating	NEMA 6 ( IP67 )
Cooling	Natural Convection - No Fans

## FEATURES & COMPLIANCE

Communication	Wireless Zigbee
Transformer Design	High Frequency Transformers, Galvanic Isolation
Monitoring	Via EMA**Online Portal
Emissions & Immunity (EMC) Compliance	FCC PART 15, ANSI C63.4, ICES-003
Safety & Grid Connection Compliance	UL1741, UL1741 SA (240V version only), CA Rule 21 (240V version only), IEEE1547, CSA C22.2 No.1071-01, NEC 2017 690.12, 690.11



\* Depending on the local regulations.

\*\*APsystems online Energy Management Analysis (EMA) platform

Specifications subject to change without notice – please ensure you are using the most recent version found at [APsystems.com](https://www.apsystems.com)

5.24.19 © All Rights Reserved