

M I D N I T E S O L A R

The 120 VAC MAGNUM E-PANEL was designed to provide the additional components necessary to create a code compliant system. This combination is now the standard off-grid system offered by North American professional Solar installers. Our E-Panels are a compact, affordable and professional panel for mounting a single inverter.

Over-current disconnects are an essential part of every RE system. Renewable energy circuit breakers are not normally stocked at your average electrical supply company. These breakers are custom manufactured to insure that these systems have the proper protection for the many different AC & DC circuits involved. The Midnite E-Panel integrates a ??? voltage PV input, circuit charge controller outputs, circuit inverter over current protection, DC load circuits, AC input disconnect, AC input/output bypass, AC load circuits, DC-GRP circuit, wind turbine input circuit and hydro input circuits. Traditional electrical supply companies do not stock this type of product.




- * **COMPACT:** Smaller size takes up less wall space
- * **MORE SLOTS:** Six din rail breaker slots for PV, Wind, Hydro, and AC distribution. Unique side plate design provides breaker flexibility
- * **HARDWARE:** Hardware included for inverter, charge controller, wall mounting brackets, remotes gfci's, DC-GFP's etc.
- * **AGENCY APPROVALS:** ETL listed to US and Canadian standards and NEC compliance eases Electrical inspector concerns
- * **INVERTER:** Inverter battery breaker and inverter cables included
- * **PREWIRED:** AC input output and bypass assembly pre-wired. Battery Plus bus pre-wired. AC, DC, and PV bus bars installed



Been mooned lately?

www.midnitesolar.com

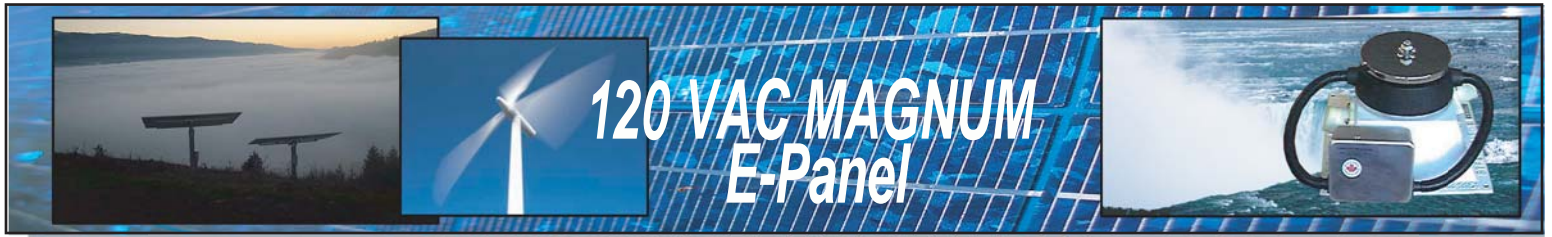

M I D N I T E S O L A R

120 VAC MAGNUM E-PANEL

FEATURES

- Small size compared to existing disconnect and over current solutions
- Pre-wired to save time, money and complexity. All field wiring connections clearly labeled
- White powder coated aluminum or standard gray powder coated steel
- Three slots for ¾" wide panel mount breakers like the MNEDC80
- Easily expands to accommodate additional inverters
- Six slots for ½" wide din rail mount breakers like the MNEPV63
- Pre-wired 50 amp 277VAC rated Inverter AC bypass switch
- Pre-wired 50 amp 277VAC rated AC Input disconnect
- Bus bars for Battery Plus, Battery Minus, ground, PV+, PV-, AC hot in, AC hot out, Neutral
- Mounting hardware for Inverter and charge controller
- Mounting brackets for hanging E-Panel on wall
- ETL listed to UL and Canadian standards
- Standard Left hand hinged door to mount inverter - Right hand optional
- Knockouts for AC and DC conduits
- Charge control brackets (CCB) & 1" close nipple
- Cut outs for one GFCI outlet
- DC Inverter Battery breaker 125A, 175A, or 250A
- Internal inverter cables



Model Number Code:

MNE1 75 ST or AL M LE
 Midnite E-Panel DC Inverter breaker Steel or Aluminum Magnum Left or Right Export wiring colors brown & blue

Note: Leave off the "E" for North America (120VAC)

Model No.	Sinewave Inverters	Modified Inverters
MNE250STM	MS2012, MS2812, MS4024	RD3924, RD4024E, MS4124E
MNE250ALM	MS2023, MS2812, MS4024	RD3924, RD2212
<i>* Note: MNE250STM and MNE250ALM can be used with all eleven inverters</i>		
MNE175STM		RD1824, RD2824, RD2624E
MNE175ALM		RD1824, RD2824, MS2712E
<i>* Note: MNE175STM and MNE175ALM can be used with all six inverters</i>		

Circuit breakers available to customize your system:

CHARGE CONTROLLER BREAKERS

DINRAIL:

- MNEPV 40, 50 & 63 - 150 VDC
- MNEPV 50-300 - 300 VDC

PANEL MOUNT:

- MNEDC 60, 70, 80, 90, & 100 – 125 VDC

DC-GFP ASSEMBLIES

- MNDC-GFP63 Dinrail 150 VDC
- MNDC-GFP50-300 Dinrail 300 VDC
- MNDC-GFP80 Dinrail 125 VDC

DC LOAD/PV COMBINER BREAKERS

- MNEPV 1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 12, 15, 20, 30, 40, 50, 63 150 VDC Dinrail
- MNEPV 07, 10, 12, 15, 20, 30, 50–300 VDC Dinrail

AC LOAD BREAKERS

- SINGLE POLE 120 VAC: 10, 15, 20 Amp
- SINGLE POLE 120-277 VAC: 30, 40, 50, 60 Amp
- TWO POLE 120/240 VAC 20, 30, 50, 60

**NOTE: See current price list for individual part numbers*

