

# 8GU1H-DEKA

## SPECIFICATIONS

Nominal Voltage (V)	12V
Capacity at C/100	36.5Ah
Capacity at C/20	31.6Ah
Weight	23.4 lbs. (10.6 kg)
Plate Alloy	Lead Calcium
Posts	Forged Terminals & Bushings
Container/Cover	Polypropylene
Operating Temperature Range	-76°F (-60°C) - 140°F (60°C)
Charge Voltage @ 68°F (20°C)	
Cycle	2.30 - 2.35VPC
Float	2.25 - 2.30VPC
Vent	Self-sealing (2 PSI operation)
Electrolyte	Sulfuric acid thixotropic gel
Terminal	Y (T873)




Rated non-spillable by ICAO, IATA and DOT

Made in the U.S.A. by East Penn Manufacturing Co, Inc.

Distributed by:


## Valve-Regulated, Gelled-Electrolyte Battery

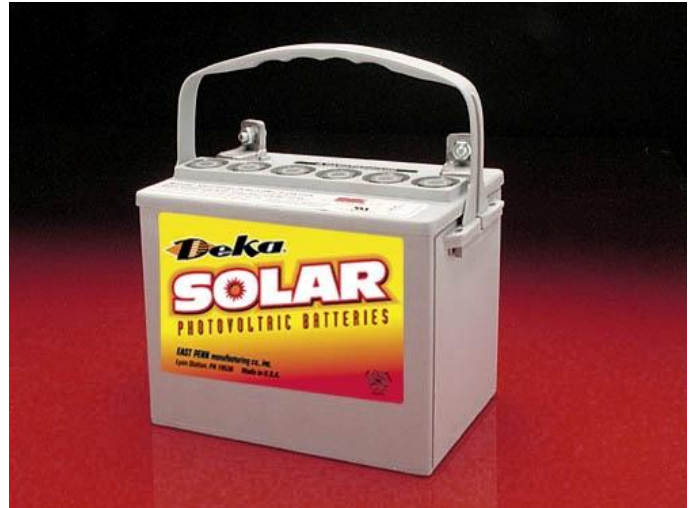

## DIMENSIONS

Length (mm)	8.31 (211 mm)
Width (mm)	5.13 (130 mm)
Height (mm)	7.25 (184 mm)

Gel Cycle Life vs Depth of Discharge at +25°C (77°F)  
Based on BCI 2-hour Capacity

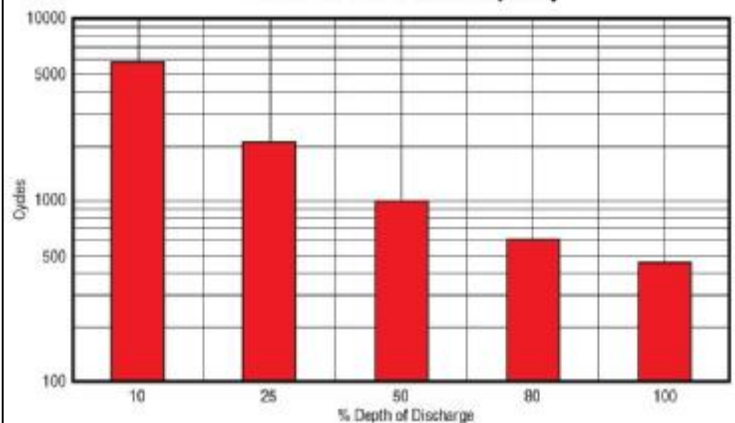

**MK Battery**

1631 South Sinclair Street • Anaheim, California 92806

Toll Free: 800-372-9253 • Fax: 714-937-0818 • E-mail: [sales@mkbattery.com](mailto:sales@mkbattery.com)

