




MidNite Solar offers a range of PV Combiners from our MNPV3 to the MNPV16. This range of combiners accommodates PV systems as small as a two string off grid cabin up to 16 strings for a 100KW commercial grid tie inverter. The MNPV series of combiners are the result of 20 years of design and manufacturing experience in the renewable energy industry. Each unit has the same quality features such as:

- * Aluminum rainproof type 3R enclosure
- * Internal plastic injection molded dead front covers
- * Knock outs that accept waterproof strain reliefs, conduit or panel mount MC type connectors
- * Knock outs for lightning arrestors
- * Uses 150VDC & 300VDC breakers or 600VDC fuses depending on model number
- * ETL listed to UL1741 for use in the US and Canada
- * Adaptable for two separate inverters or charge controllers on certain models



MNPV 6

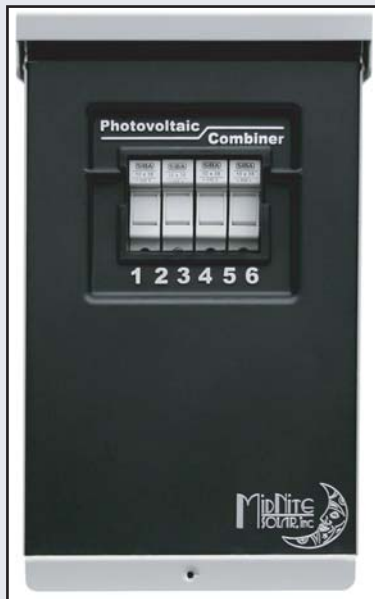

Configured for 600VDC Fuses (Gridtie)



Photo by Jack Edin



Configured for 150VDC Breakers (Offgrid)



Been mooned lately?

www.midnitesolar.com

PV Combiners- MNPV6

| | | | PV Source Circuits | | | PV Output Circuits | | | | | |
|-------------|---------|----------------------|----------------------|---------|----------------|-----------------------|------------------------|----------------|-------------------------------|--------------------------|---------|
| Model | Max VDC | Max # of Input Circ. | Max OCPD Rating Amps | OCPD | Wire Range AWG | Max # of Output Circ. | Max Cont. Current Amps | Wire Range AWG | Approved Mounting Orientation | Enclosure Type/ Material | Listing |
| MNPV3 (LV) | 150 | 3 | 20 | CB 150V | 14-6 | 1 | 60 | 14-1/0 | 90 to 14° | 3R/Alum | UL1741 |
| MNPV3 (HV) | 600 | 3 | 20 | FUSE | 14-6 | 1 | 60 | 14-1/0 | 90 to 14° | 3R/Alum | UL1741 |
| MNPV6 (LV) | 150 | 6 | 20 | CB 150V | 14-6 | 2 | 120 | 14-1/0 | 90 to 14° | 3R/Alum | UL1741 |
| MNPV6 (HV) | 600 | 4 | 20 | FUSE | 14-6 | 2 | 80 | 14-1/0 | 90 to 14° | 3R/Alum | UL1741 |
| MNPV12 (LV) | 150 | 12 | 30 | CB 150V | 14-6 | 2 | 200 | 14-2/0 | 90 to 14° | 3R/Alum | UL1741 |
| MNPV12 (HV) | 600 | 10 | 30 | FUSE | 14-6 | 2 | 200 | 14-2/0 | 90 to 14° | 3R/Alum | UL1741 |
| MNPV12-250 | 300 | 6 | 50 | CB 300V | 14-6 | 2 | 168 | 14-2/0 | 90 to 14° | 3R/Alum | UL1741 |
| MNPV16 (HV) | 600 | 16 | 15 | FUSE | 14-6 | 1 | 240 | 250MCM | 90 to 14° | 3R/Alum | UL1741 |
| MNPV16-250 | 300 | 12 | 20 | CB 600V | 14-6 | 1 | 240 | 14-2/0 | 90 to 14° | 3R/Alum | UL1741 |

MNPV6 (For 150 VDC charge controllers and 600 VDC gridtie inverters)

(The most popular PV combiner in North America.) Gray aluminum type 3R rainproof enclosure with insulating dead front, will accept six 150VDC breakers or four 600/1000VDC fuse holders. Includes 15 position PV negative bus bar, 14 position ground bus bar, 120 amp Plus bus bar for breakers and 80 amp bus bar for fuses. Punch out tabs on the plastic deadfront make for a clean installation using circuit breakers. An included snap in adapter makes for a professional looking installation when installing fuse holders. Up to three 300VDC breakers from 7 to 50 amps may be installed as a disconnect (no combining busbar) . The enclosure may be mounted to a pole or wall indoors or out.

The plus bus bar may be split to support two grid tie inverters or two charge controllers. Gridtie inverters typically can have PV minuses common. Most charge controllers can have PV minuses common (Exception XW and BlueSky).

Breakers/fuse holders sold separately

Boxed size: 9 x 14 x 4 weight: 4 Lbs.



Photo by Tim Mendenhall



ETL Listed for US & Canada



17722—67th Ave NE, Unit C, Arlington WA 98223

Ph 425.374.9060 Fax 360.691.6862

<http://www.midnitesolar.com>