Laboratory Tested

2,359 lbs Vertical Pullout!

808 lbs Side Lateral Pullout!

Serrated base grips the roof

deck to prevent the base from moving while installing

the lag bolt

professional

oducts

(805) 486-4700

(805) 486-4799-fax

1551 S. Rose Ave.

Oxnard, CA 93033

View more info on our

website at:

www.prosolar.com





Flashable Roof Stanchion

The patented design of the FastJack® is the most innovative, efficient and cost-effective tool of it's kind! The FastJack® has been laboratory tested to provide 2.359 pounds of strength using only a sinale lag bolt (included)!

Four Sizes Available!

| 3" High For low profile installations using | Part# FJ-300-18 Datey® flashings (for composition shingle roof-tops) |
|---|---|
| 4-1/2" High | Part# FJ-450-18 |
| For installations using standard flashings (for composition & flat rooftops) | |
| 6" High | Part# FJ-600-18 |
| For standard flashings (for flat tile rooftops) | |
| 7-1/2" High | Part# FJ-750-18 |
| For standard flashings (sized for S-curve tile roofs and/or double flashed installations) | |

Box includes:

The Fast Jack® design is covered under Pat. #6,360,491 "Using 1ea. 5/16" x 3-1/2" Lag Bolt



All FastJack[®] attachments are sold in heavy duty reclosable boxes which allow for easy storage and handling

(18) 1" dia. Aluminum Posts (18) Aluminum Bases (18) 3/8" x 3/4" SS Bolts


(18) 3/8" SS Flat Washers (18) 5/16" x 3-1/2" Lag Bolts

3/8" x 3/4"

Benefits of the FastJack®

- Removable post makes installation on existing roofs/retrofit quick and easy (refer to the illustration to the right)
- Patented design locates the lag bolt directly under the stanchion providing superior strength values
- Fast & easy to install-saves time and labor costs
- Precision machined from extruded aluminum, there are no welds to corrode or break
- Significantly lighter than steel for installer convenience and reduced shipping costs.
- Integrated drill guide insures perfect pilot holes every time-minimizes the possibility of splitting roof rafters
- Base design allows virtually any roof flashing to install flat on the roof deck

Email us for more information prosolar@prosolar.com

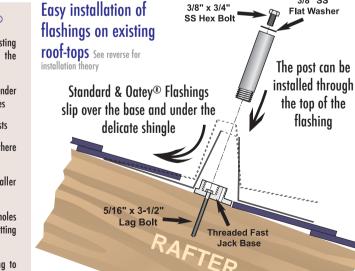

FastJack[®] FJ-300-18 For Oatey[®] style flashings



FastJack[®] FJ-450-18 For standard metal flashings



3/8" SS

Flat Washer

flashing

Easy Installation: (See FastJack® installation video at: www.prosolar.com)

