


ITEM NO.	DESCRIPTION	QTY.
1	CAP SCREW, HEX HEAD, 5/16"-18 X 3/4" UNC-2A, GRADE 8	1
2	QBASE, 1-1/4" ID, FOR 5/16" HARDWARE, A360.1 CAST AL	1
3	LAG SCREW, HEX HEAD, 5/16" X 3", ZINC	2
4	FLASHING, SPUN CONE, 18"X18"X.032", 3003 AL, MILL	1
5	COLLAR, COUNTER FLASHING, 1-1/4" ID EPDM	1
6	POST, 1-1/4" OD X 3-1/4", 6063-T5, MILL	1
7	WASHER, SEALING, 5/16" ID X 1-1/4" OD, EPDM BONDED SS	1
8	WASHER, FENDER, 5/16" ID X 1" OD, 18-8 SS	1
9	WASHER, SPLIT-LOCK, 5/16" ID, 18-8 SS	1
10	CAP SCREW, HEX HEAD, 5/16"-18 X 1" UNC-2A, 18-8 SS	1

POST AND FLASHING AVAILABLE IN MILL, CLEAR ANODIZED, AND BRONZE ANODIZED FINISHES.

STAINLESS STEEL LAG SCREWS INCLUDED WITH ANODIZED FINISHES.

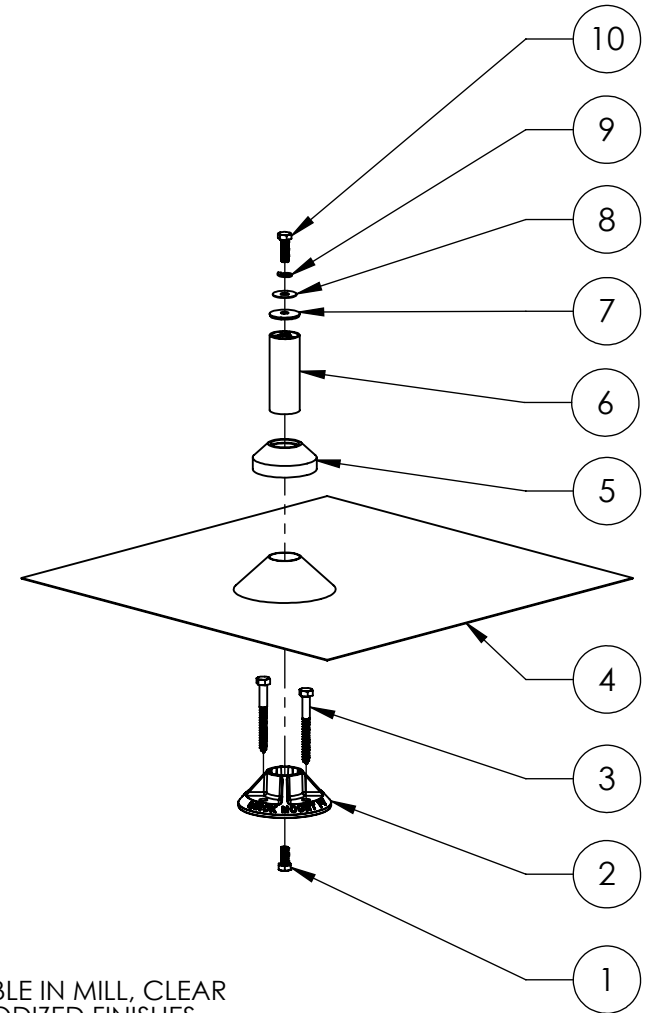

PROPRIETARY AND CONFIDENTIAL  
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF QUICK MOUNT PV. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF QUICK MOUNT PV IS PROHIBITED.

DO NOT SCALE DRAWING

**Quick Mount PV®**

TITLE: **QMNS: QBASE SHAKE AND SLATE MOUNT**

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL ± 1/8 TWO PLACE DECIMAL ±.18 THREE PLACE DECIMAL ±.125	<b>SIZE</b> <b>A</b>	DRAWN BY: RAD	REV <b>6</b>
	DATE: 1/15/2013		
SCALE: 1:8		WEIGHT: 1.93	SHEET 1 OF 1

5

4

3

2

1