

# S-5!®

## The Right Way!



VERSABRACKET™

### VersaBracket™

VersaBracket™ can be used to mount almost anything to an exposed-fastened roof system and is compatible with almost any trapezoidal exposed-fastened profile. No messy sealants to apply! No chance for leaks! The VersaBracket™ comes with factory-applied butyl sealant already in the base, and the S-5! patented reservoir conceals the sealant from UV exposure, preventing drying and cracks.


Installation is simple! VersaBracket™ is mounted in the flat of the panel, directly into the supporting structure of the roof, i.e. wood decking, wood or steel purlins or trusses. No surface preparation is necessary; simply wipe away excess oil and debris, peel the release paper from the base, align and apply. Secure through the pre-punched holes using the appropriate screws for the supporting structure.

VersaBracket™ is so strong, it will even support heavy-duty applications like snow retention. For exposed-fastened trapezoidal profiles, the VersaBracket™ is the perfect match for our ColorGard® or RamGard™ snow retention systems (For corrugated roofs use CorruBracket™). VersaBracket™ is extremely economical and facilitates quick and easy installation.

You asked for it! We've got it! Now attach the S-5-PV Kit and PV modules, through DirectAttached™ or Rail methods, along with many more roof accessories to exposed-fastened metal roofing with the S-5! VersaBracket™.




### S-5-PV Kit (DirectAttached™ or Rail)

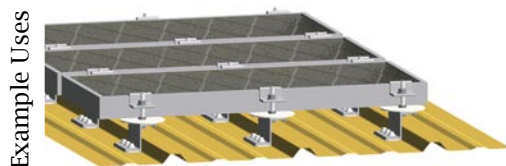

### RamGard™



### ColorGard®

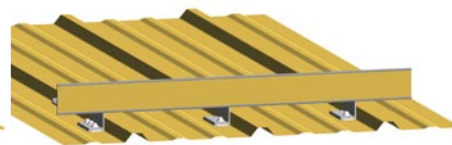


Attach almost **anything** to exposed-fastened roof systems, with no messy sealants and no chance for leaks!


888-825-3432

[www.S-5.com](http://www.S-5.com)

## VersaBracket-67™

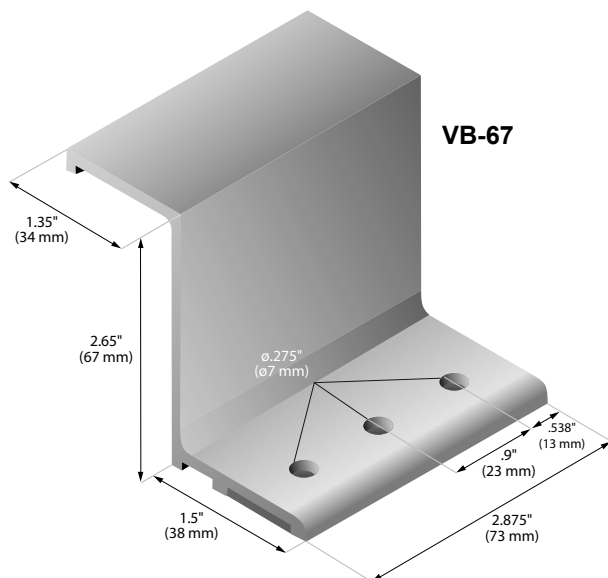

## VersaBracket-47™

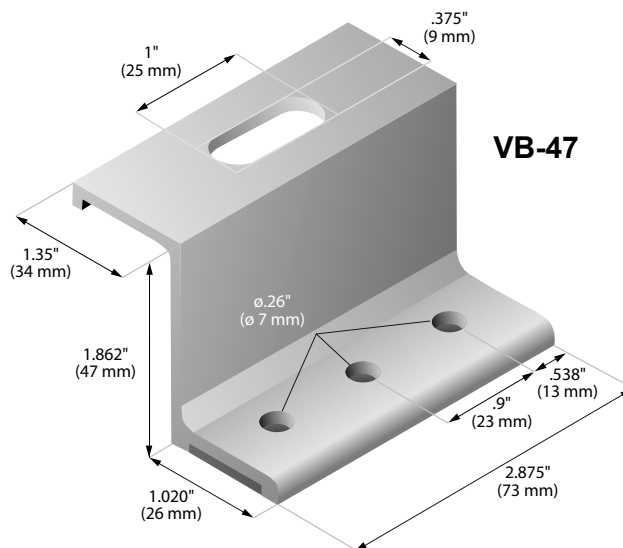

3 holes are provided for convenience and versatility. Not all holes need to be used. Due to varied applications, mounting hardware is not furnished with part.

To accommodate various rib heights, VersaBracket™ comes in two heights—the 2.65" VersaBracket-67™ and the 1.86" VersaBracket-47™. The VersaBracket-67™ mounting face has no holes or slots, thus, ancillary items are typically secured using self-tapping screws. The VersaBracket-47™ offers various mounting face configurations with minimum purchase requirements. (Contact your distributor for available configurations.) Each VersaBracket™ comes with factory-applied butyl sealant in the base. A structural aluminum attachment bracket, VersaBracket™ is compatible with most common metal roofing materials. For design assistance, ask your distributor, or use our web-based calculator at [www.S-5.com](http://www.S-5.com) for job-specific system engineering and design of your next snow retention project. Also please visit our website for more information including CAD details, metallurgical compatibilities and specifications.

Example Profile



The VersaBracket™ has been tested for load-to-failure results on wood decking, metal and wood purlins. The independent lab test data found at [www.S-5.com](http://www.S-5.com) can be used for load-critical designs and applications. S-5! holding strength is unmatched in the industry.

**VersaBracket™ is versatile! It can be used for almost any attachment need, including S-5! ColorGard®, on all types of exposed-fastened metal roofing. No messy sealants to apply. The factory-applied butyl sealant waterproofs and makes installation a snap!**



**S-5! Warning! Please use this product responsibly!**

Products are protected by multiple U.S. and foreign patents. For published data regarding holding strength, bolt torque, patents and trademarks visit the S-5! website at [www.S-5.com](http://www.S-5.com).

Copyright 2010, Metal Roof Innovations, Ltd. S-5! products are patented by Metal Roof Innovations, Ltd.

Distributed by