



SolarEdge ZigBee Repeater Installation Guide

Version 1.0

Disclaimers

Important Notice

Copyright © SolarEdge Inc. All rights reserved.

No part of this document may be reproduced, stored in a retrieval system or transmitted, in any form or by any means, electronic, mechanical, photographic, magnetic or otherwise, without the prior written permission of SolarEdge Inc.

This document is solely for the use of SolarEdge customers and employees.

The material furnished in this document is believed to be accurate and reliable. However, SolarEdge assumes no responsibility for the use of this material. SolarEdge reserves the right to make changes to the material at any time and without notice. You may refer to the SolarEdge web site (www.solaredge.com) for the most updated version.

All company and brand products and service names are trademarks or registered trademarks of their respective holders.

Patent marking notice: <http://www.solaredge.com/groups/patent>

The general terms and conditions of purchase of SolarEdge products shall apply.

The content of these documents is continually reviewed and amended, where necessary. However, discrepancies cannot be excluded. No guarantee is made for the completeness of these documents.

FCC Compliance

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment OFF and ON, you are encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and the receiver and its antenna.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Changes or modifications not expressly approved by the party responsible for compliance may void the user's authority to operate the equipment.

Table of Contents

| | |
|-------------------------------------------------------------------|-----------|
| Disclaimers | 1 |
| Important Notice | 1 |
| FCC Compliance | 2 |
| Table of Contents | 3 |
| About This Guide | 4 |
| Support and Contact Information | 5 |
| Chapter 1: Introducing the SolarEdge ZigBee Repeater | 6 |
| Overview..... | 6 |
| Package Contents | 7 |
| Chapter 2: SolarEdge Repeater User Interfaces | 8 |
| Chapter 3: Installing the Repeater | 10 |
| Installation Guidelines | 10 |
| Connecting the Repeater | 11 |
| Verifying the Connection | 12 |
| Troubleshooting..... | 12 |
| Yellow LED (Link) is OFF..... | 12 |
| Green LED (S_OK) is OFF | 13 |
| Appendix A: Technical Specifications | 14 |

About This Guide

This user guide is intended for Photovoltaic (PV) system owners, installers, technicians, maintainers and integrators who use the SolarEdge power harvesting system.

This manual describes how to install and set up the ZigBee™ communication between a SolarEdge device (inverters or Safety and Monitoring Interface) and the SolarEdge home ZigBee repeater). The manual instructions and graphics refer to the inverter; however apply to SMI as well.

This guide assumes that the SolarEdge power harvesting system is already installed and commissioned. For additional information about how to install and commission the SolarEdge power harvesting system, refer to the relevant installation guide.

The guide includes the following chapters:

- **Chapter 1: Introducing the SolarEdge ZigBee Repeater**, page 6, describes the SolarEdge ZigBee repeater functionality and connection.
- **Chapter 2: SolarEdge Repeater User Interfaces**, page 8, describes the repeater connectors and LEDs.
- **Chapter 3: Installing the Repeater**, page 10, describes how to mount, connect, and verify the connection of the SolarEdge repeater.
- **Appendix A: Technical Specifications** page 14, provides the electrical and mechanical specifications of the SolarEdge ZigBee repeater.

For further information, datasheets and the most up-to-date certifications for various products in different countries, please visit the SolarEdge website: www.solaredge.com

Support and Contact Information

If you have technical queries concerning our products, please contact us:

| | | |
|----------------|------------------|------------------------------------------------------------------|
| US & Canada | 1877 360 5292 | support@solaredge.us |
| Germany | +49 89-45459730 | support@solaredge.de |
| France | 0800917410 | support@solaredge.fr |
| Belgium | 080073041 | support@solaredge.be |
| Italy | 800 784 824 | support@solaredge.it |
| Netherlands | 08000221089 | support@solaredge.com |
| United Kingdom | 0800 028 1183 | |
| Greece | 00800125574 | |
| Israel | +972 73 240-3118 | |
| Japan | +81.3.5530.9360 | |
| Australia | 1800149229 | |
| Worldwide | +972 73 240-3118 | |
| Fax | +972 73 240-3117 | |

Before contacting SolarEdge, ensure you have the product serial number as appears on its label.

Chapter 1: Introducing the SolarEdge ZigBee Repeater

Overview

The SolarEdge ZigBee repeater (range extender) is used for extending the wireless connectivity range between SolarEdge devices that are equipped with ZigBee transmitters.

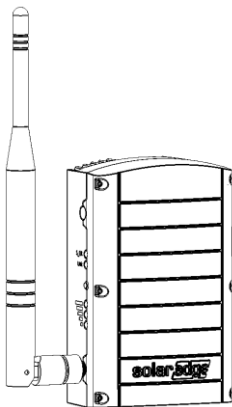


Figure 1: The SolarEdge ZigBee Repeater

For example, use the SolarEdge ZigBee repeater to improve communication between the SolarEdge home gateway and a SolarEdge inverter by placing the repeater between them (see Figure 2).

The repeater is pre-configured as slave and will be discovered by the device configured as master during device discovery.

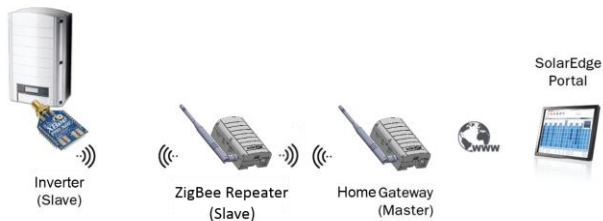


Figure 2: The SolarEdge ZigBee Repeater between the Home Gateway and Inverter

Package Contents

- ZigBee repeater with antenna
- Power supply
- This installation guide

Chapter 2: SolarEdge Repeater User Interfaces

The following interfaces are used in this product:

- **µUSB Connector** - Connection to the power supply
- **LEDs** - The repeater has four LED indicators, as follows:

| Label and Color | Indication | Functionality |
|-------------------------------|------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| S_OK (green) | Communication passing through this device is received by the SolarEdge monitoring portal | ON - connection with SolarEdge master device is OK, and the master device is connected to the server. OFF - Communication with the SolarEdge master device has failed |
| Link (yellow) | ZigBee RF communication with associated master | ON - Connection with SolarEdge master device is OK. OFF - Communication with the SolarEdge master device has failed |
| 3x Signal strength (green) | Signal strength to nearest ZigBee device (Low/Medium/High) | All 3 LEDs ON - High Two LEDs ON - Medium One LED ON - Low |
| Power (green) | Power | Power supply connected to the repeater |

The other interfaces are *not used* in this product.



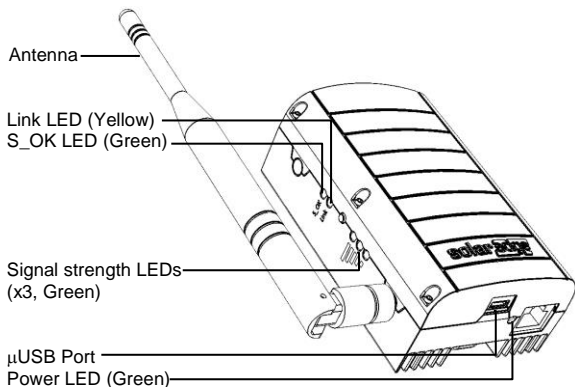


Figure 3: User Interfaces

Chapter 3: Installing the Repeater

Installation Guidelines

The following requirements apply when locating and mounting the SolarEdge repeater:

- The SolarEdge repeater is suitable for mounting indoors only. For outdoor installation, use an external plastic outdoor enclosure (not provided by SolarEdge)
- The SolarEdge repeater must always remain in an ambient temperature of -20°C (-4°F) to $+60^{\circ}\text{C}$ (140°F).
- Protect the SolarEdge repeater from dust, wet conditions, corrosive substances, and vapors.
- The SolarEdge repeater can be placed on the desk or installed on a wall.

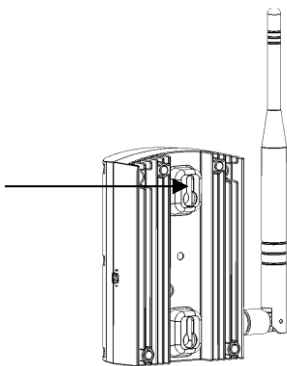


Figure 4: Wall Mount Option

- Ensure that the antenna is always vertically oriented.

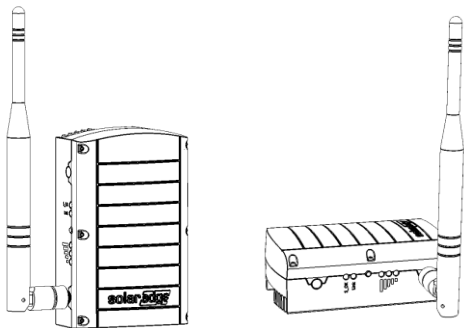


Figure 5: Antenna Orientation

Connecting the Repeater

- 1 Check that ZigBee transmitters are installed in all SolarEdge devices (all slaves and master).
- 2 Place the repeater between the two devices that are not communicating and need range extension.
- 3 Connect the power supply to the μ USB connector and connect to an AC source. The power LED is lit to indicate power connection.
- 4 Perform device discovery/slave detection using the master device, as described in the relevant manual.
- 5 Check that the **Link** yellow LED and the **S_OK** green LED on the repeater are ON, to indicate communication with the master device.

Verifying the Connection

- If you use the repeater to improve communication between the home gateway and the inverter(s), check that the Link yellow LED of the home gateway blinks after device discovery. The home gateway should blink the total number of detected devices, including repeaters.
- Check that all slave devices have ZigBee status OK, as follows:
 - a. Short-press the device's (inverter or any other slave device) LCD light button until reaching the *Server* status screen:

```
S e r v e r :   Z i g b e e   < S _ O K >
S t a t u s                < O K >
```

- b. Check that S_OK appears in the Server field to indicate a functioning connection to the SolarEdge monitoring portal. Check that the <OK> appears in the Status field.

Troubleshooting

Yellow LED (Link) is OFF

If the yellow LED (Link) is OFF after device discovery, a ZigBee RF connection error may have occurred, or the ZigBee connection was not established. Try the following troubleshooting actions:

- Relocate the repeater closer to the master ZigBee device to improve signal strength.
- Check the ZigBee configuration of the master device and repeat the device discovery/slave detection.
- Make sure the home gateway yellow LED (Link) blinks the total number of slaves including the repeater(s).
- Repeat the device discovery/slave detection.

Green LED (S_OK) is OFF

If the green LED (S_OK) is OFF after device discovery, a connection error may have occurred: Connection with the master device has failed, or the master device is not connected to the server. Try the following troubleshooting actions:

- Verify that the S_OK LED on the master device is ON, which indicates the communication with the SolarEdge portal is established.
- Repeat the device discovery/slave detection.

Appendix A: Technical Specifications

| | North America | Worldwide | Unit |
|------------------------------------|---------------|-----------|------|
| Performance | | | |
| Transmit power | 18 | 10 | dBm |
| Receiver Sensitivity | -102 | | dBm |
| EIRP with Antenna | 22 | 14 | dBm |
| Outdoor (LOS) range* | 250 | | m |
| Indoor range* | 15 | | m |
| Environmental | | | |
| Operating temperature | -20 ÷ +60 | | °C |
| Storage temperature | -40 ÷ +85 | | °C |
| Relative humidity (non condensing) | 0 ÷ 80 | | % |
| Ingress protection | IP20 | | |
| Power Supply Requirements | | | |
| Voltage | 5 | | V |
| Current | 1 | | A |

* Approximate values, may differ depending on specific installation conditions

If you have technical queries concerning our products,
please contact our support through SolarEdge service portal:
<http://www.solaredge.com/groups/support/services>

| | |
|----------------|------------------------------------------------------------------|
| North America | (Toll free) 1877 360 529 2 |
| Australia | (Toll free) 1800 149 229 |
| Germany | 089 454 597 30 |
| France | (Toll free) 0800 917 410 |
| Italy | (Toll free) 0800 784 824 |
| United Kingdom | (Toll free) 0800 028 1183 |
| Belgium | (Toll free) 0800 730 41 |
| Israel | 073 240 311 8 |
| Rest of world | + 1 (0) 650 319 884 3 |
| Fax | + 972 (0) 73 240 311 7 |
| Email to: | support@solaredge.com |

www.solaredge.com

solaredge



MAN-01-00130-1.0